


Item code: 70219-HXVR-04L104H1

Product description: Turbo HD DVR VALUE Series

Main features: TURBO HD DVR 4 Channel, support H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression. HDTVI input 8 MP, AHD input 5 MP, HDCVI input 5 MP, CVBS input PAL/NTSC, Audio IN/Out 4/1, Serial interface RS-485 (half-duplex), USB interface 2 × USB 2.0, Power supply 12 Vdc.



SPECIFICATIONS

Recording	
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding resolution	<i>When 1080p lite mode is not enabled:</i> 8 MP/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF <i>When 1080p Lite mode is enabled:</i> 8 MP Lite/5 MP/4 MP/3MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame rate	Main stream: <i>When 8 MP Lite mode not enabled</i> 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) <i>When 8 MP Lite mode enabled</i> 8 MP Lite/5 MP@12 fps/4 MP/3 MP/1080P/720P/WD1/4CIF/VGA/CIF@15 fps Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video bit rate	32 Kbps to 10 Mbps
Dual stream	Support
Stream type	Video, Video & Audio
Audio compression	G.711u
Audio bit rate	64 Kbps
Video and Audio	
IP video input	4-ch (up to 8-ch) Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras
Analog video input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
HDCVI input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
CVBS input	PAL/NTSC



BS OHSAS 18001: 2007
Occupational Health and Safety Management System



ISO 9001: 2015
Quality Management System



ISO 14001: 2015
Environmental Management System




CI ITPI: 2015
100% Made in Italy Certificate



MAZi – Brand distributed by LINCE ITALIA S.p.A.
 Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
 Tel.: +39 06 92928252 - Fax: +39 06 92942586
www.lince.net – info@lince.net
MD-03.11 Rev. 6 - Pag.: 1 di 2

CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
VGA output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
HDMI output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Audio input	4-ch, RCA (2.0 Vp-p, 1 K Ω)
Audio output	1-ch, RCA (Linear, 1 K Ω)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 K Ω) (using the first audio input)
Synchronous playback	4-ch
Network	
Remote connection	32
Network protocol	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Network interface	1, RJ45 10 M/100 M self-adaptive Ethernet interface
Auxiliary Interface	
SATA	1 SATA interface
Capacity	Up to 10 TB capacity for each disk
Serial interface	RS-485 (half-duplex)
Alarm in/out	04/01/20
USB interface	2 × USB 2.0
General	
Power supply	12 Vdc
Consumption (without HDD)	≤ 10 W
Working temperature	-10 °C ÷ 55 °C (14 °F ÷ 131 °F)
Working humidity	10% ÷ 90%
Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)
Weight (without HDD)	≤ 1.16 kg (2.6 lb)

Physical Interface

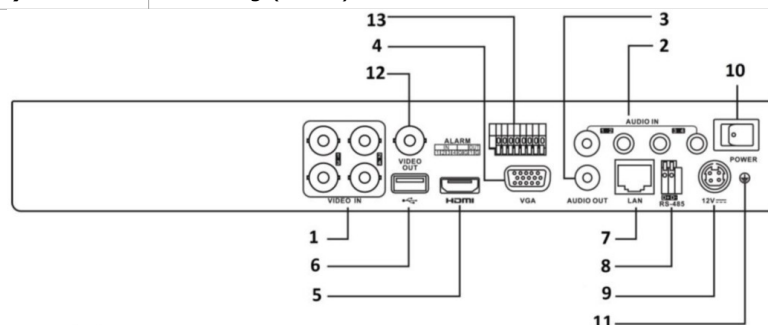

No.	Description	No.	Description
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	12 VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		